

PRODUCT DATA SHEET

Category: Signs
Subcategory: Door Signs
Family Name: Solstice

Ceiling Surface Door Sign

LED 2.1W | IP54

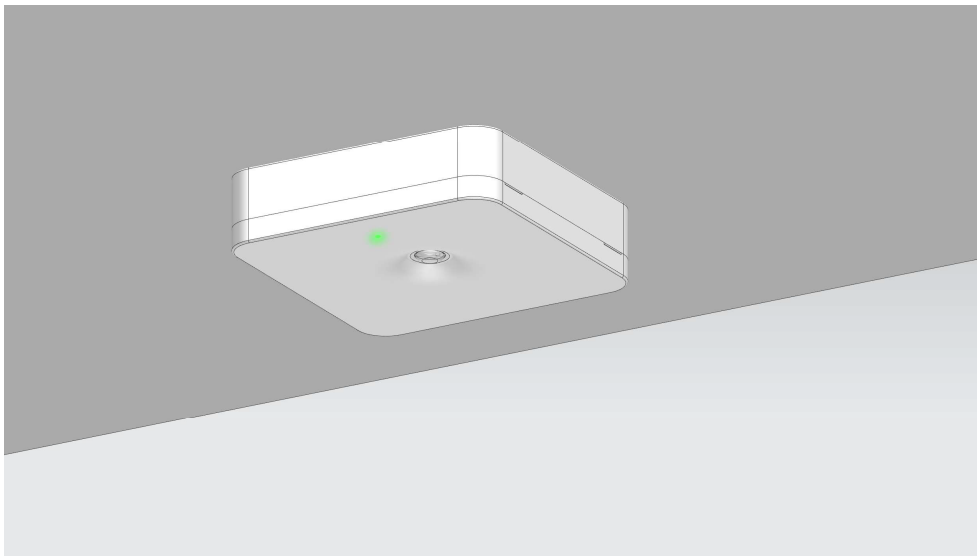


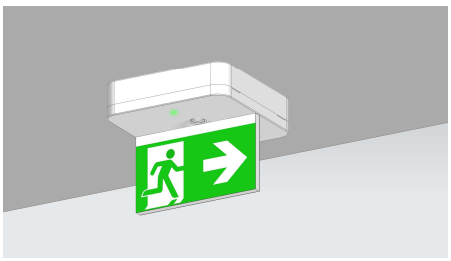

specifications


Mounting	**Ceiling Surface**
Type	**Self-Contained**
Mode Of Operartion	**Maintained/Non-Maintained**
Test Device	**Automatic**
Emergency Duration	**2/3/8 h(Selctable)**
Battery	**LiFePO4 3.2 V/3 Ah, LiFePO4 3.2 V/ 6Ah (high power version)**
Housing Material	**PC**
Housing Color	**White**
Insulation Class	**II**
IP Rating	**IP54**
CCT	**5000K**
CRI	**70**
Rated Voltage	**220-240 VAC,50/60Hz**
Rated Wattage	**2.1W**
Dimension	**L153xH153mm**
Weight	**0.35 kg, 0.43 kg (high power version)**
Ambient Temp.	**0 °C to +40 °C**

Technical Dimensions

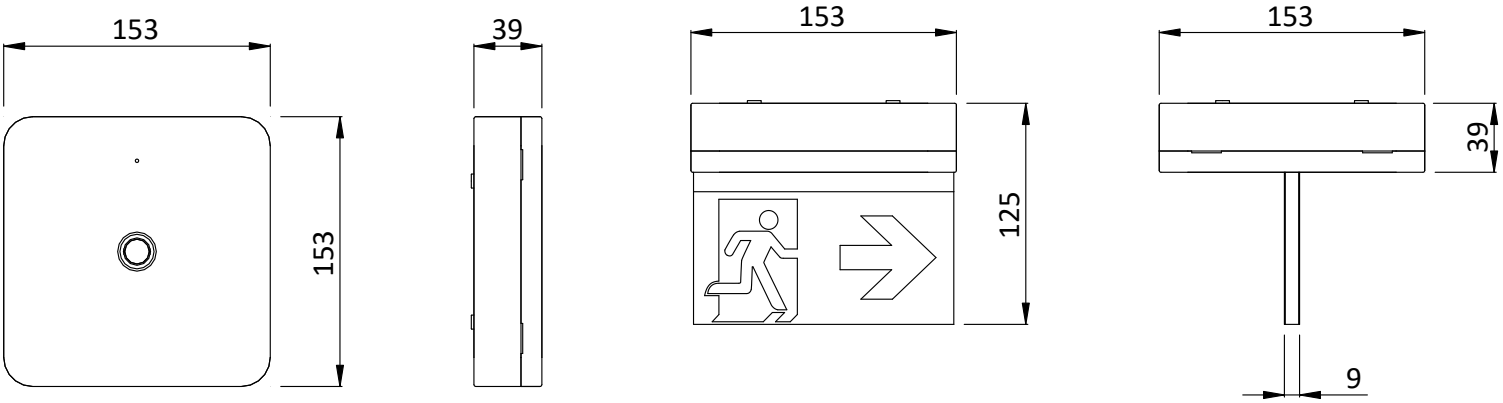

Accessories

Pictogran panel,15m **BU-SOL-DL1-PP**

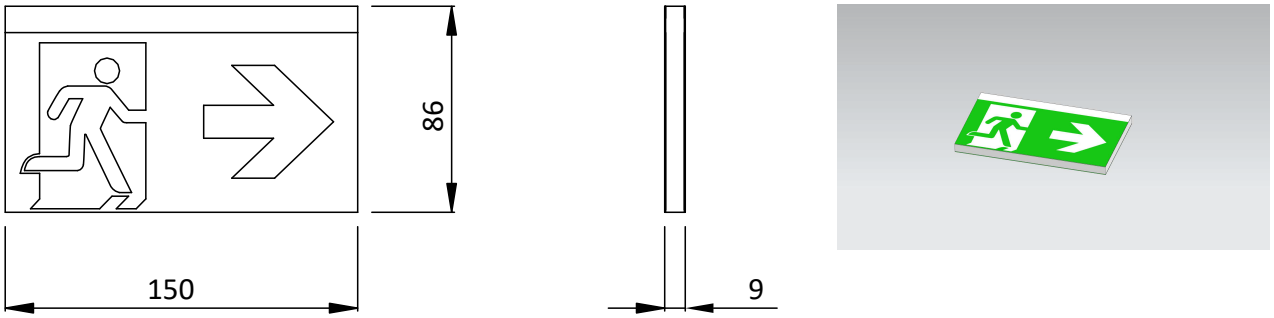

Photometric Data

Luminous flux (lm)

Article number	Battery	Mains	Emergency			
			1 h	2 h	3 h	8 h
DL2 LFP ESC	3.2V/3Ah	143	259	235	183	70
DL2 LFP ANT	3.2V/3Ah	145	261	233	185	68
DL2 LFP ESC HP	3.2V/6Ah	171	446	377	316	157
DL2 LFP ANT HP	3.2V/6Ah	157	411	360	302	151

Product Codes

BUHO CODE	Description
BU-SOL-DL2 LFP ESC	Safety luminaire DL2, ceiling mounting, LiFePO4, 1/2/3/8 h, escape route
BU-SOL-DL2 LFP ANT	Safety luminaire DL2, ceiling mounting, LiFePO4, 1/2/3/8 h, anti-panic
BU-SOL-DL2 LFP ESC HP	Safety luminaire DL2, ceiling mounting, LiFePO4, 1/2/3/8 h, ,escape route, High power
BU-SOL-DL2 LFP ANT HP	Safety luminaire DL2, ceiling mounting,LiFePO4, 1/2/3/8 h, anti-pacnic, High power
BU-SOL-DL2 CS ESC	Safety luminaire DL2, ceiling mounting, central battery, escape route
BU-SOL-DL2 CS ANT	Safety luminaire DL2, ceiling mounting, central battery, anti-panic