búho lighting


PRODUCT DATA SHEET

Category: Ilumination Technical
Subcategory: Surface Mounted
Family Name: Steam

LED 72x2 W PROJECTOR

building facade | high brightness | Osram | Meanwell



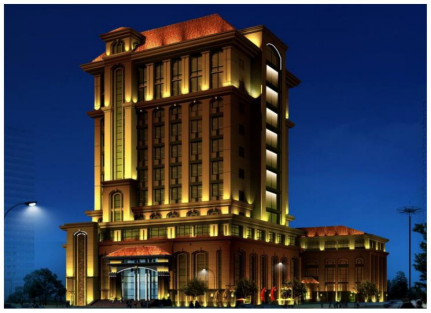



Technical Description

Series of projector to be mounted on pole system, wall, floor. Available in different sizes, rotatable and inclinable on the vertical axis, they are designed for the lighting of parking lots, cycle paths, squares, facades, green areas, perimeter areas and other architectural elements in general thanks to a wide range of optics and wattages.It comes with a series of accessories that ensure different type of mounting. The body and diffuser closure ring are constructed of high oxidation resistant aluminum alloy making the product resistant to atomospheric agents and UV rays, guaranteeing maximum protection over the years. Silicone gaskets ensure maximum sealing in all operating and temperature conditions. The transparent tempered glass diffuser ensures maximum light transmittance.All the external screws are in stainless steel.


specifications

Material	**Aluminum Alloy**
Finish/Colour	**Black**
Input Volt	**220V AC**
Source Power Type	**Osram Oslon 3.9W Max**
Source Power	**72Wx2**
Life Time	**50000h L70 B10**
Lumen Output	**120 lm/W**
Real Flux	**6912lmx2**
Power Supply Unit	**650 mA**
CRI	**82**
Saftey Class	**III**
Weight	**11Kg**
Dimensions	**L377xW88xH221MM**
Application	**Surface Mounted**
Elliptical Lens	**30°**
Protection Grade	**IP67**
MCADAMS	**2**
Labelling	CE


*Available Upon Request


Beam Angle:60°

Photometric Detail

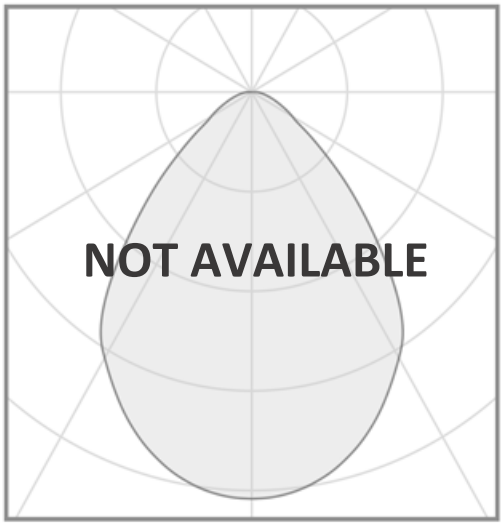

Technical Dimensions

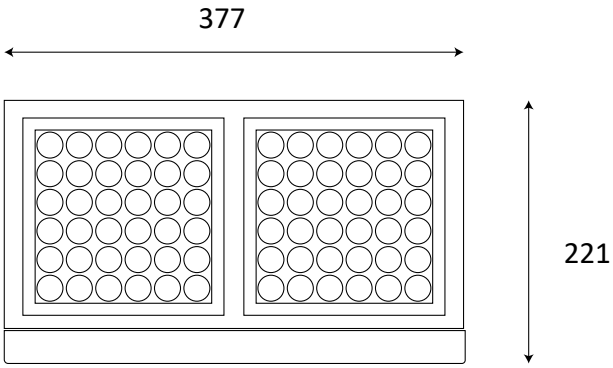

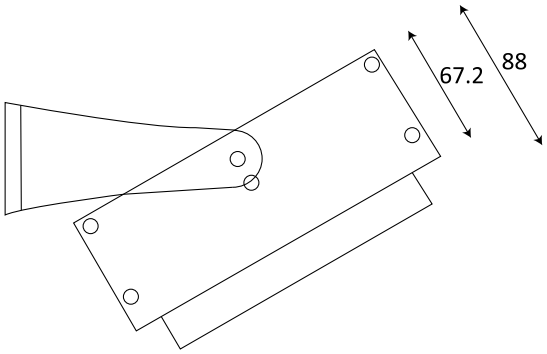

Product Codes

30°		
2700K	3000K	4000K
BU119059	BU119066	BU119073