# PRODUCT DATA SHEET

**Category**: Illumination Technical
**Subcategory:** Exterior Spike Light
**Family Name:** Stinger

# Outdoor 6063 aluminum spike light

LED 5W | IP65 | IK07



## Technical Description


Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system. Available in various sizes, rotatable and inclinable on the vertical axis, they are designed for lighting small facades, small trees, bushes, stautes, columns and other architectural elements in general thanks to a wide range of optics and wattages. comes with a series of accessories that ensure different type of mounting and beam control. The body is in Die cast aluminum making the product excellently resistant to atomospheric agents or saltiness, guaranteeing maximum protection over the years also in area close to the sea. Silicone gaskets ensure maximum sealing in all operating and temperature conditions. The ultra transparent tempered glass diffuser ensures maximum light transmittance and is finished with a silkscreen border. All the external screws are in stainless steel.

## specifications


| | |
|---|---|
| Material | **Aluminium** |
| Finish/Colour | **Black Anodized Finish** |
| Input Volt | **AC20-240V** |
| Source Power Type | **CREE COB** |
| Source Power | **5 W** |
| Life Time | **50000h L70 B10** |
| Lumen Output | **120 lm/W** |
| Real Flux | **480 lm** |
| CRI | **82** |
| Saftey Class | **III** |
| Weight | **0.35Kg** |
| Dimensions | **D45xL215MM** |
| Application | **Ingoround Mounted** |
| Protection Grade | **IP65** |
| MCADAMS | **2** |
| Labelling | CE |

* Available On Request
Beam Angle: 15°/40°/56°10*60°/20*30
Grey Finish

## Photometric Detail

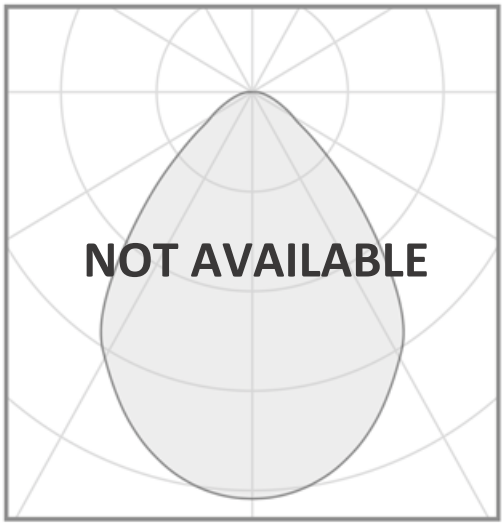


## Technical Dimensions

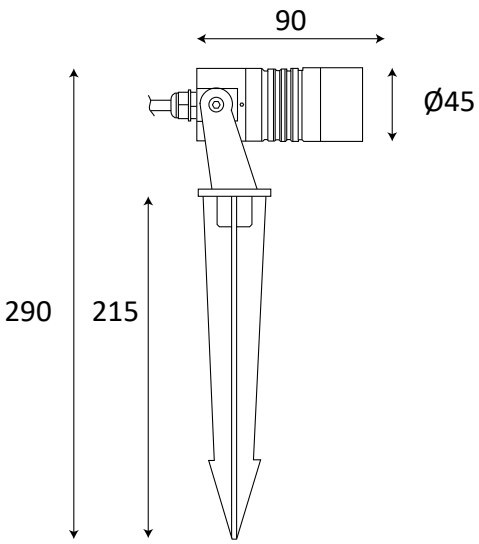


## Product Codes

| | 25° | | | |
|---|---|---|---|---|
| | 2700K | 3000K | 4000K | 5000K |
| Black | BU119204 | BU119210 | BU119216 | BU119222 |