PRODUCT DATA SHEET

Category: Ilumination Technical
Subcategory: Industrial
Family: Tubo
Code: BU21530

LED Tri-prood Light

LED 32W | IP67&IP69K





Technical Description


This durable IP67 & IP69K-rated LED light withstands extreme conditions, including high water pressure and temperatures up to 80°C. With high efficiency (60 lm/W) and CRI >80, it delivers bright, accurate lighting. Eco-friendly and certified (CE, RoHS), it features a 120° beam angle and instant full brightness. Suitable for surface mount or suspended installation, backed by a 5-year warranty.

specifications

Material	**Milky PC / PMMA housing @304/316 Stainless Steel End Caps**
Input Volt	**200-240 VAC/100-277 VAC (50/60Hz)**
Source Power Type	**Lumileds**
Source Power	**32W**
Life Time	**50000h L70 B10**
Input Current	**0.9A@220VAC**
Diffuser	**Prismatic**
Luminous Flux	**5120 lm**
CRI	**93**
Saftey Class	**III**
Operation Tem	**-20°C~+60°C**
Dimensions	**Ø75xxH1452mm**
Installation Mount	**Surface/Suspneded**
Elliptical Lens	**120°**
Protection Grade	**IP67&IP69K**
IK Class	**PMMA IK08/PC IK10**
Labelling	CE




Photometric Detail

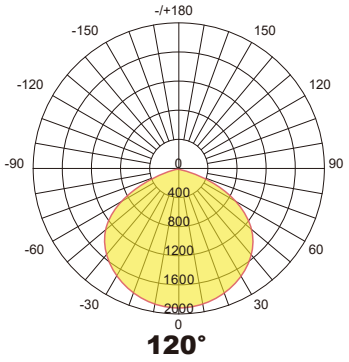


120°

Technical Dimensions


Single Installation



Linkable Installation



Surface Mount



Suspension Mount

