búho lighting


# PRODUCT DATA SHEET

**Category:** Ilumination Technical
**Subcategory:** Magnetic Series
**Family Name:** Meta Fitting

## Track Spot Light

7.5W | LED Bridgilux| IP20



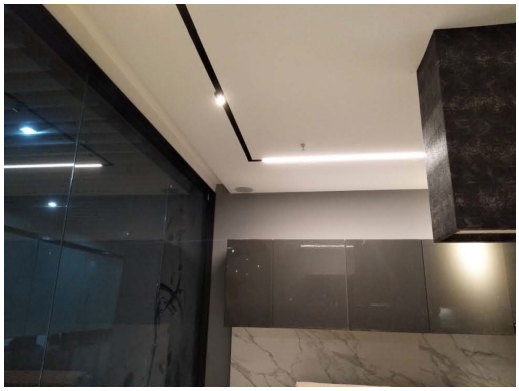

## Technical Description


High luminance, high efficiency, without radiation, pure color, energy saving and environmental protection LED illuminants.
• Extreme aesthetics and unique optical design, use high transparent PMMA cover, uniformed and soft lighting without glare.
• Surface anode oxidation processing, high-quali ty aluminum tracks, mult ifunctional mounting struct ure, dist inctive solu tion in seamlessly connecting accessories.
• Self-design patented mounting mode of strong magnetic adsorpt ion, simple, flexible and convenient opera t ing .
• Knob Dimming and DALI Dimming control, can freely adjust lamp luminance, energy saving and environmental protection.

DALI | Knob Dim | Ra 90 | F | | III | IP 20


## specifications


| | |
|---|---|
| Material | **Aluminum** |
| Input Volt | **DC24V** |
| Source Power Type | **Bridgelux SMD** |
| Source Power | **7.5W** |
| Lumen Output | **120 lm/W** |
| Real Flux | **675 lm** |
| Life Time | **50000h L70 B10** |
| Dim Mode | **DALI Konb Dim** |
| CRI | **90** |
| Saftey Class | **III** |
| Weight | **0.44Kg** |
| Finish | **Textured Black** |
| Dimensions | **W34xL300xH72mm** |
| Application | **Surface Mounted** |
| Elliptical Lens | **100°** |
| Protection Grade | **IP20** |
| MCADAMS | **2** |
| Labelling | CE |


## Photometric Detail










## Technical Dimensions





## Optical Parameters



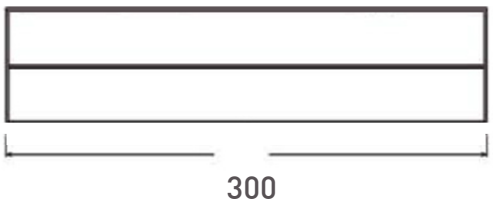WF - Wide Flood
α 120°



## Product Codes

| 100° | | |
|---|---|---|
| 2700K | 3000K | 4000K |
| BU111509 | BU111513 | BU111517 |