
PRODUCT DATA SHEET

Category: Ilumination Technical
Subcategory: Magnetic Series
Family Name: Meta Fitting

Track Spot Light

15W | LED Bridgilux| IP20



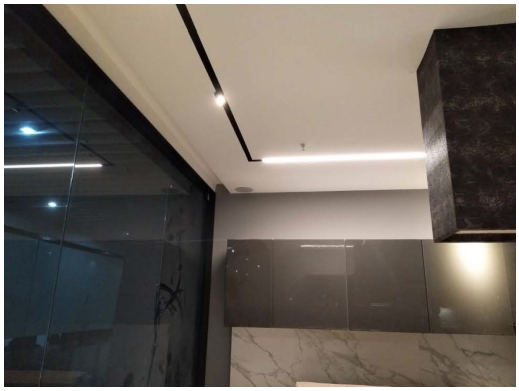

Technical Description


High luminance, high efficiency, without radiation, pure color, energy saving and environmental protection LED illuminants.
• Extreme aesthetics and unique optical design, use high transparent PMMA cover, uniformed and soft lighting without glare.
• Surface anode oxidation processing, high-quali ty aluminum tracks, mult ifunctional mounting struct ure, dist inctive solu tion in seamlessly connecting accessories.
• Self-design patented mounting mode of strong magnetic adsorpt ion, simple, flexible and convenient opera t ing .
• Knob Dimming and DALI Dimming control, can freely adjust lamp luminance, energy saving and environmental protection.


DALI | Knob Dim | Ra 90 | F | | III | IP 20


specifications


Material	**Aluminum**
Input Volt	**DC24V**
Source Power Type	**Bridgelux SMD**
Source Power	**15W**
Life Time	**50000h L70 B10**
Lumen Output	**120 lm/W**
Real Flux	**1350 lm**
Dim Mode	**DALI Konb Dim**
CRI	**90**
Saftey Class	**III**
Weight	**0.76Kg**
Finish	**Textured Black**
Dimensions	**W34xL600xH72mm**
Application	**Surface Mounted**
Elliptical Lens	**100°**
Protection Grade	**IP20**
MCADAMS	**2**
Labelling	CE


Photometric Detail













Technical Dimensions

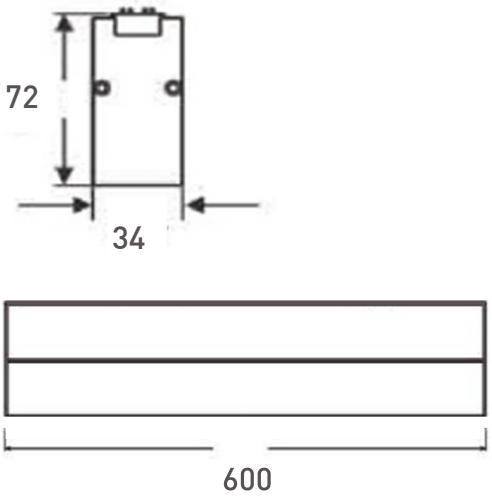

Optical Parameters



WF - Wide Flood
α 120°



Product Codes

100°		
2700K	3000K	4000K
BU123761-Dali	BU111510-Dali	BU111514-Dali