# PRODUCT DATA SHEET

**Category:** Ilumination Technical
**Subcategory:** Exterior Inground Lamp
**Family Name:** Terra

## LED Depth Illuminant & Adjustable Lamp

10W | Deep Anti-glare | 316L stainless steel IK09 Depth Illuminant









## Technical Description


In-ground luminaire suitable for walk over and drive over, with static load resistance of 2000 Kg. With adjustable beam angle by an external key, suitable for the oblique illumination of façades and architectural elements, or etched glass for diffused distribution combined with glare control, making it suitable for pedestrian pathways. Available with Dali dimmable driver on request with extra cost.

## specifications


| | |
|---|---|
| Material | **Die-casting Aluminium housing+ 8mm Tempering glass+316 Stainless cover** |
| Input Volt | **12V/24V** |
| Source Power Type | **CREE COB** |
| Source Power | **10x1W** |
| Life Time | **50000h L70 B10** |
| Lumen Output | **120 lm/W** |
| Real Flux | **1080 lm** |
| CRI | **82** |
| Saftey Class | **III** |
| Dimensions | **Ø130xH116mm** |
| Cut-out | **118.5mm** |
| Application | **Inground** |
| Elliptical Lens | **24°** |
| Protection Grade | **IP67** |
| MCADAMS | **2** |
| Labelling | CE |

- Available Upon Request
  Beam Angles 18°/38°/60°
  CCT 2700K/3000K/4000K

## Photometric Detail

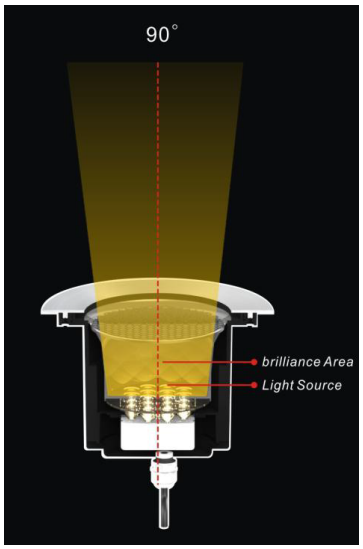


## Technical Dimensions

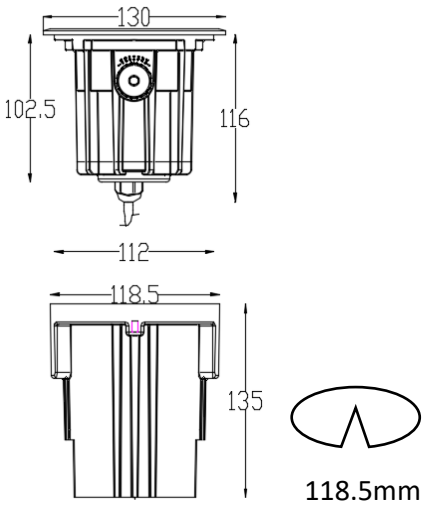


## Product Codes

| | 24° | |
|---|---|---|
| 2700K | 3000K | 4000K |
| BU119126-Adj | BU119130-Adj | BU119134-Adj |