PRODUCT DATA SHEET

Category: Ilumination Technical
Subcategory: Exterior Inground Lamp
Family Name: Terra Series

LED Depth Illuminant & Adjustable

20W | Deep Anti-glare | 316L stainless steel IK09







Technical Description


In-ground luminaire suitable for walk over and drive over, with static load resistance of 2000 Kg. With adjustable beam angle by an external key, suitable for the oblique illumination of façades and architectural elements, or etched glass for diffused distribution combined with glare control, making it suitable for pedestrian pathways. Available with Dali dimmable driver on request with extra cost.

specifications


Material	**Die-casting Aluminium housing+ 8mm Tempering glass+316 Stainless cover**
Input Volt	**24V DC**
Source Power Type	**CREE COB**
Source Power	**20x1W**
Life Time	**50000h L70 B10**
Lumen Output	**120 lm/W**
Real Flux	**2160 lm**
CRI	**82**
Saftey Class	**III**
Dimensions	**Ø180xH152mm**
Cut-out	**Ø165mm**
Application	**Inground**
Elliptical Lens	**24°**
Protection Grade	**IP67**
MCADAMS	**2**
Labelling	CE

- Available Upon Request
  Beam Angles 18°/38°/60°
  CCT 2700K/3000K/4000K/5000K/6500K

Photometric Detail

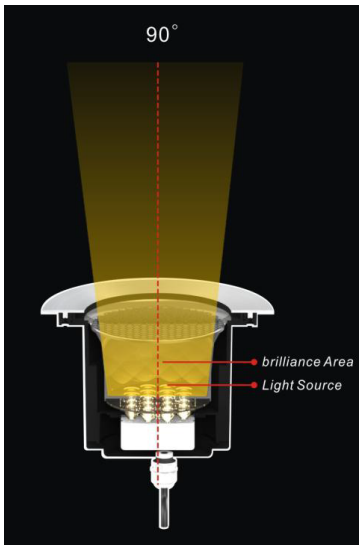

Technical Dimensions

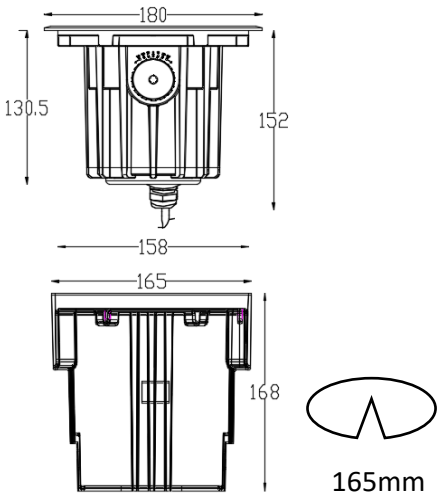

Product Codes

	24°	
2700K	3000K	4000K
BU118931-Adj	BU118935-Adj	BU118939-Adj