
PRODUCT DATA SHEET

Category: Signs
Subcategory: Door Signs
Family Name: Egress

Wall Door Sign


LED 2.0W | IP20/40/54/65

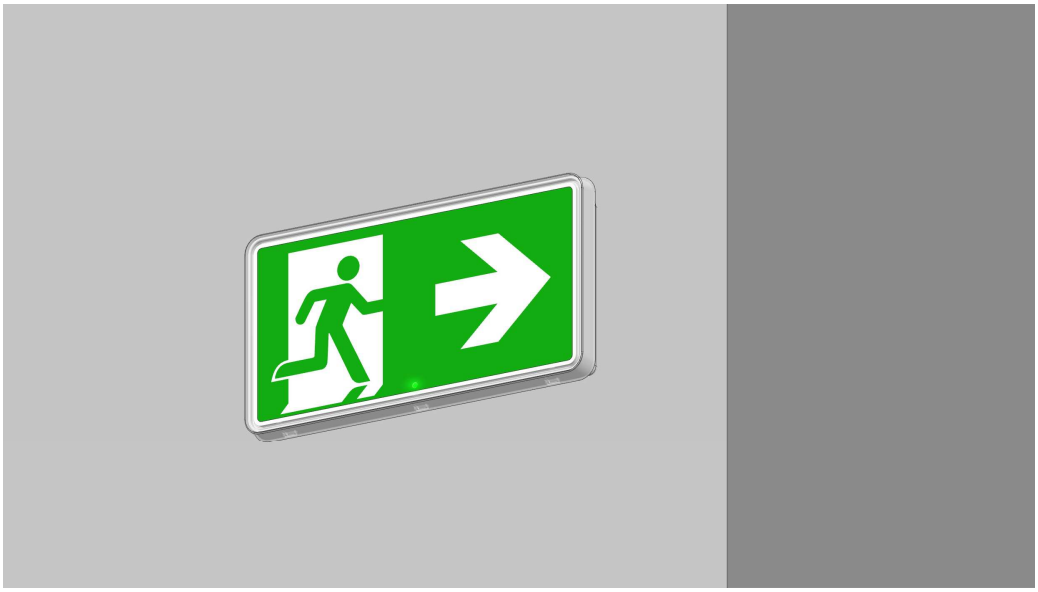


specifications

Viewing Distance	**30m**
Mounting	**Wall**
Type	**Self-Contained**
Mode Of Operartion	**Maintained/Non-Maintained**
Test Device	**Manual,Automatic**
Emergency Duration	**1/2/3/8 h(Selctable)**
Battery	**LiFePO4 3.2 V/1.5 Ah PO4 3.2V/3Ah(high power version)**
Housing Material	**PC**
Housing Color	**White**
Insulation Class	**II**
IP Rating	**IP20/40/54/65**
CCT	**6500K**
CRI	**90**
Rated Voltage	**220-240 VAC,50/60Hz**
Rated Wattage	**2.0W**
Dimension	**325.5x175.5x48.5mm**
Weight	**0.7 kg,0.78Kg(high power version)**
Ambient Temp.	**0 °C to +40 °C**

Technical Dimensions

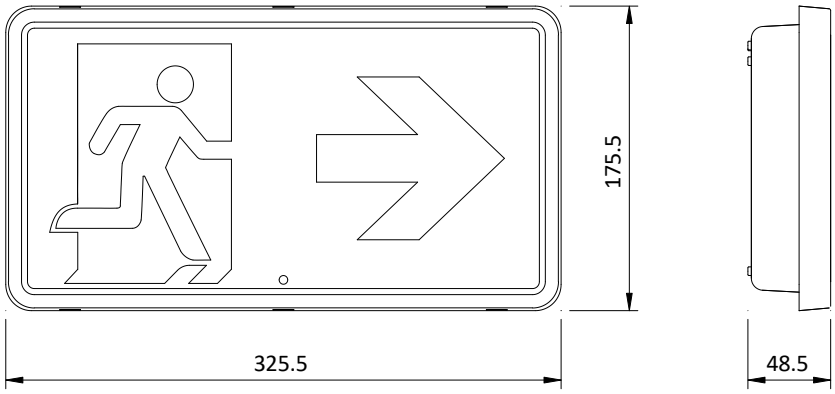

Photometric data

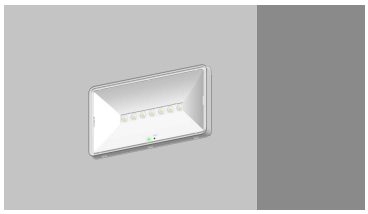

Luminous flux (lm)

Article number	Luminous flux (without pictogram)				
	Mains	Emergency			
		1 h	2 h	3 h	8 h
X7-30 LFP	120 lm	115 lm	63 lm	26 lm	13 lm
X7-30 LFP HB	120 lm	252 lm	113 lm	69 lm	22 lm

Product Codes

BUHO CODE	Description
BU-EGR-X7-30 LFP	Emergency luminaire, 30m, wall mounted, LiFePO4, 1/2/3/8 h
BU-EGR-X7-30 LFP HB	Emergency luminaire, 30m, wall mounted, LiFePO4, 1/2/3/8 h, high brightness
BU-EGR-X7-30 CS	Emergency luminaire, 30m, wall mounted, central battery