PRODUCT DATA SHEET

Category: Illumination Technical
Subcategory: Exterior Spike Light
Family Name: Stinger

Outdoor 6063 aluminum spike light

LED 11W| IP66| IK07



Technical Description


Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system. Available in various sizes, rotatable and inclinable on the vertical axis, they are designed for lighting small facades, small trees, bushes, stautes, columns and other architectural elements in general thanks to a wide range of optics and wattages. comes with a series of accessories that ensure different type of mounting and beam control. The body is in Die cast aluminum making the product excellently resistant to atomospheric agents or saltiness, guaranteeing maximum protection over the years also in area close to the sea. Silicone gaskets ensure maximum sealing in all operating and temperature conditions. The ultra transparent tempered glass diffuser ensures maximum light transmittance and is finished with a silkscreen border. All the external screws are in stainless steel.

specifications


Material	**Aluminium**
Finish/Colour	**Black Anodized Finish**
Input Volt	**AC20-240V**
Source Power Type	**CREE COB**
Source Power	**11W**
Life Time	**50000h L70 B10**
Lumen Output	**120 lm/W**
Real Flux	**1056 lm**
CRI	**82**
Saftey Class	**III**
Weight	**0.75Kg**
Dimensions	**D70xL166MM**
Application	**Surface Mounted**
Elliptical Lens	**25°**
Protection Grade	**IP66**
MCADAMS	**2**
Labelling	CE

* Available On Request
Beam Angle: 18°/24°/38°/60°
Grey Finish

Photometric Detail

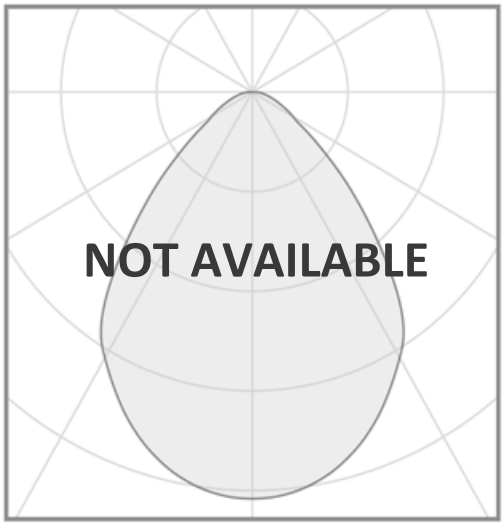

Technical Dimensions

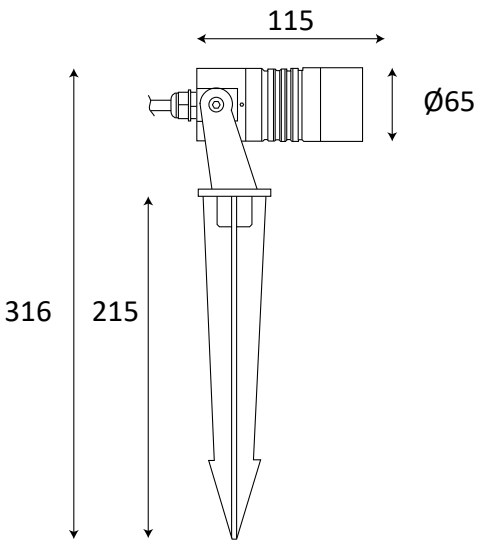

Product Codes

	25°		
	2700K	3000K	4000K
Black	BU119156	BU119162	BU119168