
PRODUCT DATA SHEET

Category: Ilumination Technical
Subcategory: Recssed Mounted
Family Name: Fotia Series

LED Linear Asymmetric Alum Profile

LED 30W/per mtr | Anti-glare | 6063 Aviation Aluminum

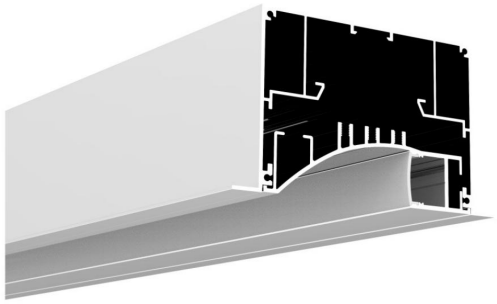


Technical Description


An asymmetric luminaire designed for installation into modular ceiling 600x600 with a visible support structure and into plaster-cardboard ceiling. Designed for school boards and shop shelves.
Installation: Into modular ceiling 600x600 with a visible supported structure or into plaster cardboard ceiling
Application: offices,conference rooms,classrooms

specifications


Material	**6063 Aluminum + PC Diffuser**
Input Volt	**220-240V 50/60Hz**
Source Power Type	**Osram SMD2835**
Source Power	**30W**
Life Time	**50000h L70 B10**
Real Flux	**120lm/w**
CRI	**90**
Saftey Class	**III**
Weight	**4.8Kg**
Power Supply Unit	**750 mA**
Finish	**Anodized Aluminum**
Dimensions	**L1020W122xH75mm**
Cut-out	**W100xH74mm**
Application	**Recessed Mounted**
Elliptical Lens	**side emitting 120°**
Protection Grade	**IP44**
MCADAMS	**2**
Labelling	CE

Product Detail

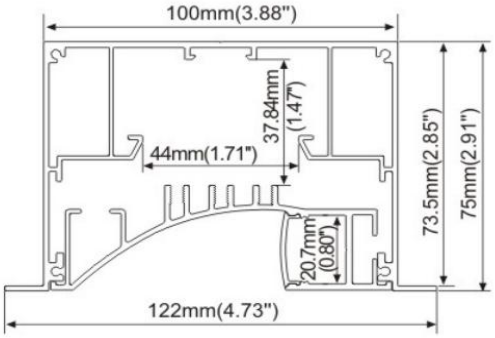



- PMMA semi-clear cover



End caps



Internal clip




safety wire



Stainless clip

LM2835R56024P14

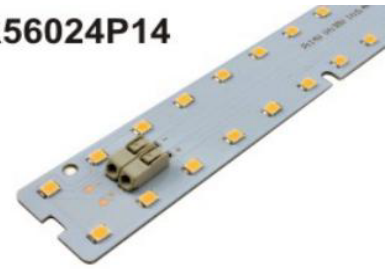

Product Codes

BU118305	Fotia LED Asymmetric Alum Profile LED 30W/mtr 2700K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz
BU118306	Fotia LED Asymmetric Alum Profile LED 30W/mtr 3000K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz
BU118307	Fotia LED Asymmetric Alum Profile LED 30W/mtr 4000K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz